

This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should not therefore be construed as a warranty of specific properties of the products described or a warranty for fitness for a particular purpose.

Classified according to EU Directive 1999/45/EC
For further information see our "Material Safety Data Sheets".

Edition 4, 11.2007

The latest revised edition of this brochure is the English version, which is always published on our web site www.uddeholm.com



SS-EN ISO 9001
SS-EN ISO 14001

General


Moldmax HH is a high-strength beryllium copper mould alloy made by Brush Wellman Inc. for plastics moulding applications. Its main properties include:

- high thermal conductivity
- good corrosion resistance
- good polishability
- good wear resistance
- good resistance to galling
- good machinability
- high strength and hardness
- excellent weldability

Typical analysis %	Be 1,9	Co + Ni 0,25	Cu Bal.
Delivery condition	High hard = 40 HRC (Low hard = 30 HRC)		
Colour code	HH Black/Gold LH Red/Gold		

Moldmax HH is widely used for injection moulding tools or as cores and inserts in steel moulds. When used in steel mould it effectively cools hot spots, reducing or eliminating the need for cooling channels.

Moldmax HH is available in wrought round and flat section, machined core pins, and welding wire.

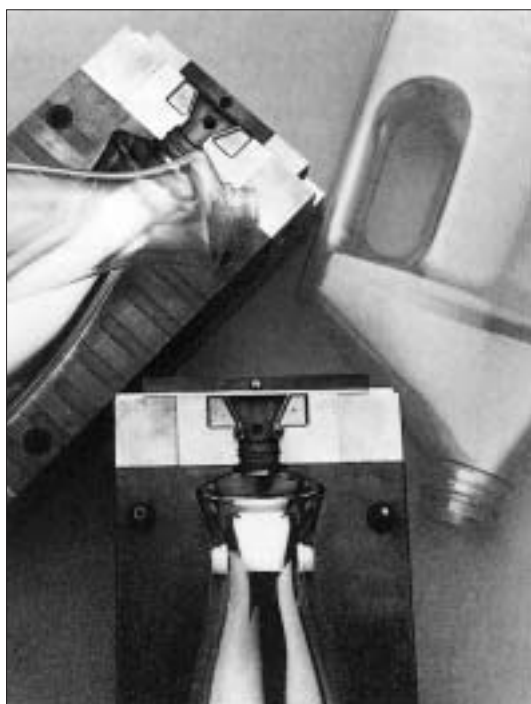

Two halves of a Moldmax HH beryllium copper blow mould.

Moldmax HH's high thermal conductivity, 3 to 5 times better than steel, ensures uniform, rapid heat removal, minimizing part distortion, warpage, poor replication of detail and similar defects. In many cases it can significantly reduce cycle times, even when used in a steel mould just for selected cores and inserts.

For mould applications which require even higher thermal conductivity than that of Moldmax HH, Protherm beryllium copper mould alloy is available, see separate technical brochure.

Applications

The special properties of Moldmax HH beryllium copper alloy make it a suitable mould/core/insert material for a wide variety of moulding situations but especially where a combination of high thermal conductivity, corrosion resistance and good polishability are needed.

- Blow moulds: pinch offs, neck rings and handle inserts
- Injection mould: moulds, cores, inserts
- Injection nozzles and manifolds for hot runner systems

Properties

Physical data

Data at room and elevated temperatures.


Temperature	20°C (68°F)	200°C (390°F)	300°C (570°F)
Density, kg/m ³ lb/in ³	8 350 0,302	8 275 0,299	8 220 0,297
Modulus of elasticity N/mm ² psi	131 100 19 x 10 ⁶	124 100 19 x 10 ⁶	103 400 15 x 10 ⁶
Coefficient of thermal expansion from °C to 20°C from °F to 68°F	– –	17 x 10 ⁻⁶ 9,7 x 10 ⁻⁶	17,8 x 10 ⁻⁶ 9,9 x 10 ⁻⁶
Thermal conductivity W/m°C			
HH 40 HRC	105	145	155
LH 30 HRC	120	160	170
Btu in/ft ² h °F			
HH 40 HRC	754	994	1063
LH 30 HRC	823	1097	1166
Specific heat, J/kg°C Btu/lb °F	380 0,091	480 0,114	535 0,128

Tensile strength at room temperature

The tensile values are to be considered as approximate only.

Hardness	HH 40 HRC	LH 30 HRC
Tensile strength, R_m N/mm ² psi	1 280 185 000	1 170 170 000
Yield strength, $R_{c0,2}$ N/mm ² psi	1 070 155 000	970 140 000
Elongation, A_5 %	6	8

RELATION BETWEEN STRENGTH AND HEAT CONDUCTIVITY FOR DIFFERENT MOULD MATERIAL

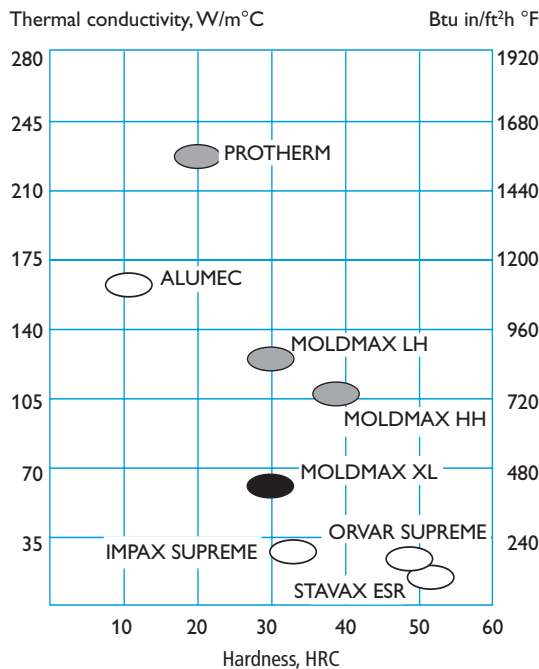

Note: Increasing alloying content gives a higher strength, but a lower thermal conductivity. However, this is only valid when comparing material within one material group i.e. steel must be compared with steel and copper with copper alloys.

Heat treatment

Moldmax HH is delivered in the heat treated condition—additional heat treatment is not normally required.

Machining

Moldmax HH has a good machinability and can be machined with conventional cutting tools. Perform machining wet to avoid breathing metal dust.

The cutting data, in following tables, are to be considered as guiding values which must be adapted to existing local conditions.

Turning

Cutting data parameters	Turning with carbide		Turning with high speed steel
	Rough turning	Fine turning	
Cutting speed, v_c m/min f.p.m.	270–300 890–990	300–370 990–1220	60–90 200–300
Feed, f mm/rev i.p.r.	0,3–0,6 0,012–0,023	–0,3 –0,012	–0,3 –0,012
Depth of cut, a_p mm inch	2–6 0,08–0,23	–2 –0,08	–2 –0,08
Carbide designation ISO	K20	K20	–

Use tools with generous positive rake angles

Milling

FACE AND SQUARE SHOULDER FACE MILLING

Cutting data parameters	Milling with carbide		Milling with high speed steel
	Rough milling	Fine milling	
Cutting speed, v_c m/min f.p.m.	100–150 330–490	150–200 490–660	45–60 150–200
Feed, f_z mm/tooth in/tooth	0,2–0,4 0,008–0,016	0,1–0,2 0,004–0,008	–0,1 –0,004
Depth of cut, a_p mm inch	2–5 0,08–0,20	–2 –0,08	–2 –0,08
Carbide designation ISO	K20	K20	–

Use tools with positive rake angles when milling with carbide

END MILLING

Cutting data parameters	Type of milling		
	Solid carbide	Carbide indexable insert	High speed steel
Cutting speed, v_c m/min f.p.m.	80–100 260–330	150–200 490–660	45–60 ¹⁾ 150–200
Feed, f_z mm/tooth in/tooth	0,010–0,10 ²⁾ 0,0004–0,004	0,08–0,20 ²⁾ 0,003–0,008	0,05–0,35 ²⁾ 0,002–0,014
Carbide designation ISO	–	K20	–

- ¹⁾ For coated HSS end mill an increased cutting speed of ~30% can be used
- ²⁾ Depending on radial depth of cut and cutter diameter


Drilling

HIGH SPEED STEEL TWIST DRILL

Drill diameter		Cutting speed v_c		Feed	
mm	inch	m/min	f.p.m.	mm/r	i.p.r
–5	–3/16	30–40	100–130	0,03–0,08	0,001–0,003
5–10	3/16–3/8	30–40	100–130	0,08–0,15	0,003–0,006
10–15	3/8–5/8	30–40	100–130	0,15–0,20	0,006–0,008
15–20	5/8–3/4	30–40	100–130	0,20–0,25	0,008–0,010

When drilling holes deeper than 1 x drill diameter use “Peckdrilling” and retract the drill after each 5 mm drilled depth.

Standard HSS drills can be used but for best performance the tip should be altered to a “brass point” according to the figure below.

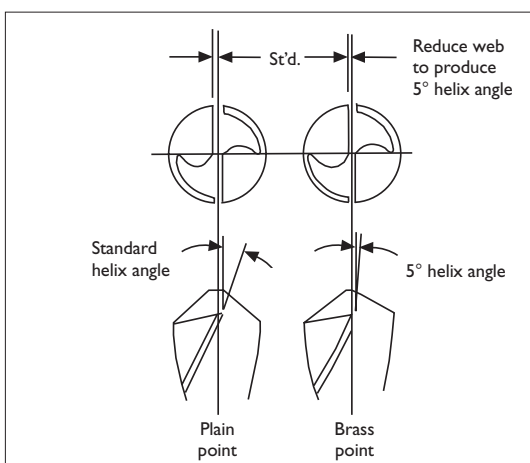

Threading with tap

When tapping Moldmax HH use taps with straight flutes. Use same kind of taps when tapping blind holes. Suitable cutting speed 6–8 m/min. Use cutting compound or cutting oil.

Grinding

Conventional grinding wheels can be used when grinding Moldmax HH. Surface grinding, use A 54 LV-type of wheels. Cylindrical grinding, use A 60 LV-type of wheels.

All grinding should be done wet to avoid breathing metal dust.

Surface treatments

To enhance the surface properties of Moldmax HH, standard treatments can be applied.


Treatment	Benefits
Hard chrome	Wear resistance, corrosion resistance, hardness.
Electroless (chemical) Nickel	Hardness, wear resistance, surface release, corrosion resistance.
Electroless Nickel with Teflon	Hardness, wear resistance, surface release
PVD: Titanium Nitride Chromium Nitride	Superior wear resistance, surface release.

Note: Treatment temperature should not exceed 320°C (610°F).

EDM

While Moldmax HH’s high thermal conductivity makes it slower to EDM than mould steel, EDM’ing presents no significant problem.

Proper ventilation with an effective exhaust system is essential to prevent fumes in the air.

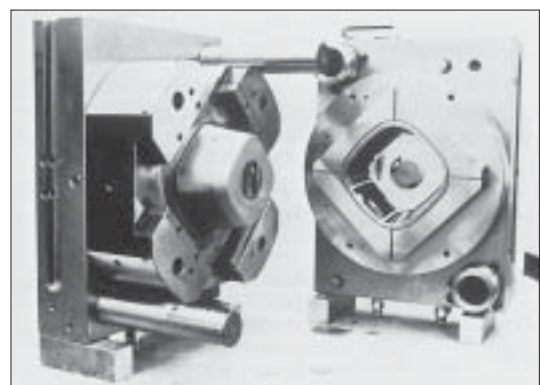

Welding

Moldmax HH can easily be welded if good care is taken and good welding practices are followed. The area to be welded should be thoroughly cleaned with a degreasing solvent. The always present oxidized layer should be removed using aggressive brushing, sand blasting or acid pickling immediately prior to the welding.

For best results TIG (GTAW) or MIG (GMAW) is recommended. Suitable welding consumables are available for welding Moldmax HH.

The weld and the surrounding area will show a lower hardness. If the strength of the weld is crucial, the whole part needs to be re-heat treated including solution annealing, quenching and age-hardening. After such a treatment the weld will have the same strength as the base material.

For more information, contact your local Uddeholm office.

Welding operations should be carried out using properly designed local exhaust ventilation to draw all fumes away from the operator and through an appropriate filter before venting outside of the work area.

Polishing

Moldmax HH has very good polishability and highly glossy surfaces are readily achievable. The following steps can serve as guidelines:

1. After grinding, pre-polish using successively finer grit stones ending with a 600 grit.
2. Polish with diamond paste grade 15 to obtain a dull satin looking surface.
3. Polish with a grade 6 diamond paste.
4. Polish with a grade 3 diamond paste.
5. If necessary, hand finish with a #1 grade diamond paste.

As in all polishing, work thoroughness and cleanliness are of utmost importance. In order to avoid overpolishing, or “orange peel” effect, do not polish longer than necessary to achieve an even looking surface.

Safe handling

Moldmax HH is a copper-alloy with a content of ~2% Beryllium.

Make sure, during the machining of Moldmax HH, to avoid breathing metal dust fume or mist. Perform machining, grinding and polishing wet when possible. If dry operation is needed use ventilation to capture the dust.

Further information can be found in our “Material Safety Data Sheets”.

Further information

Contact your local Uddeholm office for additional information on selection, heat treatment, application and availability of Uddeholm tooling materials.



Network of excellence

Uddeholm is present on every continent. This ensures you high-quality Swedish tool steel and local support wherever you are. Assab is our wholly-owned subsidiary and exclusive sales channel, representing Uddeholm in various parts of the world. Together we secure our position as the world's leading supplier of tooling materials.

Uddeholm is the world's leading supplier of tooling materials. This is a position we have reached by improving our customers' everyday business. Long tradition combined with research and product development equips Uddeholm to solve any tooling problem that may arise. It is a challenging process, but the goal is clear – to be your number one partner and tool steel provider.

Our presence on every continent guarantees you the same high quality wherever you are. Assab is our wholly-owned subsidiary and exclusive sales channel, representing Uddeholm in various parts of the world. Together we secure our position as the world's leading supplier of tooling materials. We act worldwide, so there is always an Uddeholm or Assab representative close at hand to give local advice and support. For us it is all a matter of trust – in long-term partnerships as well as in developing new products. Trust is something you earn, every day.

For more information, please visit www.uddeholm.com or www.assab.com

NDING
PRESEN
HING YOU EA
THING YO
A NEW WAY O
LIER OF TOO
STRENGTH INNOV
HIGH PERFORMA
RIALS PARTNERS
ACHINABILI
VING PROBLE
ENEFITS LONG
SOMETHING YO
A NEW WAY O
PPLIER OF TOO
KNOWLEDGE U
OVATION KNOWLEDG
PRESENCE LONG D
EARN, EVERY
AUTOMOTIVE
LD'S LEADING S
RLD'S LEAD
TILITY TOUGHN
MENT PARTNERSH
WLEDGE UNDER
KNOWLEDGE
ABILITY RELI
NETWORK
LEMS AUTOM
TOTAL ECON
TOOLS TOTAL ECO
TILITY TOUGHN
NESS WORLDW
UST IS SOMETHI
ANDING MACHINAB
SULTS SOLVING PROBLE
ECONOMY THE W
NESS STRENGT
TILITY TOUGHNESS STR
OF TOOLING MATERIALS F
KNOWLEDGE UNDERSTANDING MAC
URABILITY RELIABILITY
DAY LONG LASTING TOO
TRUST IS SOMETHING YOU EARN
IVE A NEW WAY OF THI
SUPPLIER OF TOOLING M
TRENTH INNOVATION KN
HNESS STRENGTH INNOVATION K
PRESENCE LONG DURABILITY
RUST IS SOMETHING YOU EARN,
PROBLEMS AUTOMOTIVE